



## PRODUCT PARAMETER

**BW1013Air** | 3000mAh | 1USB-C | Magnetic Wireless Power Bank

- Model: BW1013Air
- Capacity: 3000mAh
- Input USB-C : 5V/2A (10W)
- Single-port output USB-C : 5V/2A (10W)
- Wireless Charging: 5W/7.5W
- Simultaneous output: :5V, 2A
- Size:
- Battery Cell Brand: ATL (safe lithium-ion cell)



## PRODUCT PARAMETER

**BW2013Air** | 5000mAh | 1USB-C | Magnetic Wireless Power Bank

- Model: BW2013Air
- Capacity: 5000mAh
- Input USB-C : 5V 3A, 9V 2.22A, 12V 1.67A (20W Max)
- Single-port output USB-C : 5V 3A, 9V 2.22A, 12V 1.67A (20W Max)
- Wireless Charging: 5W/7.5W
- Simultaneous output: :5V, 3A
- Size:70x102x6.7mm
- Battery Cell Brand: ATL (safe lithium-ion cell)



## PRODUCT PARAMETER

**BW2013CN Air | 5000mAh | 1USB-C | Magnetic Wireless Power Bank**

- Model: BW2013CN Air
- Capacity: 5000mAh
- Input USB-C : 5V 3A, 9V 2.22A, 12V 1.67A (20W Max)
- Single-port output USB-C : 5V 3A, 9V 2.22A, 12V 1.67A (20W Max)
- Wireless Charging: 5W/7.5W
- Simultaneous output: :5V, 3A
- Size:70x102x6.7mm
- Battery Cell Brand: ATL (safe lithium-ion cell)



## PRODUCT PARAMETER

**BW3013 Air | 10000mAh | 1USB-C | Magnetic Wireless Power Bank**

- Model: BW3013Air
- Capacity: 10000mAh
- Input USB-C : 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Single-port output USB-C : 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Wireless Charging: 5W/7.5W/15W
- Simultaneous output: :5V, 3A
- Size:70x104x12.5mm
- Battery Cell Brand: ATL (safe lithium-ion cell)



## PRODUCT PARAMETER

**BW3013Pro** | 10000mAh | 2USB-C | Magnetic Wireless Power Bank

- Model: BW3013Pro
- Capacity: 10000mAh
- Input USB-C / USB-C Cable : 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Single-port output USB-C / USB-C Cable : 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 2.25A (45W Max)
- Wireless Charging: 5W/7.5W/10W/15W/25W
- Simultaneous output: :5V, 3A
- Size:70x104x13.6mm
- Battery Cell Brand: ATL (safe lithium-ion cell)



## PRODUCT PARAMETER

**BW2011-Qi2 | 5000mAh | 1USB-C | Magnetic Wireless Power Bank**

- Model: BW2011
- Capacity: 18.5Wh (5000mAh)
- Magnetic Wireless: 5W, 7.5W, 10W, 15W Qi2.0/MagSafe
- Type-C Input: 5V 3A, 9V 2.22A, 12V 1.5A(20W Max)
- Type-C Output: 5V 3A, 9V 2.22A, 12V 1.5A(20W Max)
- Size: 103x65x9.8mm



## PRODUCT PARAMETER

**BW2011CN** | 5000mAh | 1USB-C | Magnetic Wireless Power Bank (CCC)

- Model: BW2011CN
- Capacity: 5000mAh
- Input USB-C : 5V 3A, 9V 2.22A , 12V 1.67A (20W Max)
- Single-port USB-C output: 5V 3A, 9V 2.22A, 12V 1.67A (20W Max)
- Wireless charging : 5W , 7.5W , 10W , 15W
- Simultaneous output: :5V, 3A
- Size: 103x65x9.8mm
- Battery cell: 566078/CHANGHONG



## PRODUCT PARAMETER

**BW3010D-Qi2 | 10000mAh | 1USB-C | Magnetic Wireless Power Bank**

- Model: BW3010D
- Capacity: 36Wh (5000mAh\*2 7.2V)
- Magnetic Wireless: 5W, 7.5W, 10W, 15W MPP Qi2.0(15W Max)
- Type-C1 Input: 5V 3A, 9V 3A, 10V 2.25A, 12V 2.5A, 15V 2A, 20V 1.5A(30W Max)
- Type-C1 Output: 5V 3A, 9V 3A, 10V 2.25A, 12V 2.5A, 15V 2A, 20V 1.5A(30W Max)
- Size: 102.7x68.6x17.8mm
- Battery Cell Brand: Lishen



## PRODUCT PARAMETER

**BW3010DS-Qi2 | 10000mAh | 1USB-C | Magnetic Wireless Power Bank**

- Model: BW3010DS
- Capacity: 36Wh (5000mAh\*2 7.2V)
- Magnetic Wireless: 5W, 7.5W, 10W, 15W MPP Qi2.0(15W Max)
- Type-C1 Input: 5V 3A, 9V 3A, 10V 2.25A, 12V 2.5A, 15V 2A, 20V 1.5A(30W Max)
- Type-C1 Output: 5V 3A, 9V 3A, 10V 2.25A, 12V 2.5A, 15V 2A, 20V 1.5A(30W Max)
- Size: 102.7x68.6x17.8mm
- Battery Cell Brand: ATL (safe lithium-ion cell)



## PRODUCT PARAMETER

**BW3010DCN-Qi2 | 10000mAh | 1USB-C | Magnetic Wireless Power Bank**

- Model: BW3010DCN
- Capacity: 10000mAh
- Input : 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Wireless charging : 5W , 7.5W , 10W , 15W
- Simultaneous output: :5V, 3A
- Size: 102.7x68.6x17.8mm
- Battery cell : 606072\*2/ Lishen



## PRODUCT PARAMETER

**BW3010M-Qi2 | 10000mAh | 1USB-C | Magnetic Wireless Power Bank**

- Model: BW3010M
- Capacity: 36Wh (5000mAh\*2 7.2V)
- Magnetic Wireless: 5W, 10W, 15W MPP Qi2.0(15W Max)
- Input: Type-C1: 5V 3A, 9V 3A, 10V 2.25A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Output : Type-C1 : 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Size: 102x69.4x17.9mm
- Battery Cell Brand: Lishen

# RFQ and Inquiry

Whatsapp: +86-18665819835

Email: sales@xinspower.com



## PRODUCT PARAMETER

**BW3010MS-Qi2 | 10000mAh | 1USB-C | Magnetic Wireless Power Bank**

- Model: BW3010MS
- Capacity: 36Wh (5000mAh\*2 7.2V)
- Magnetic Wireless: 5W, 10W, 15W MPP Qi2.0(15W Max)
- Input: Type-C1: 5V 3A, 9V 3A, 10V 2.25A, 12V 2.5A, 15V 2A, 20V 1.5A(30W Max)
- Output : Type-C1 : 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Size: 102x69.4x17.9mm
- Battery Cell Brand: ATL (safe lithium-ion cell)



## PRODUCT PARAMETER

**BW3010MCN** | 10000mAh | 1USB-C | Magnetic Wireless Power Bank (CCC)

- Model: BW3010MCN
- Capacity: 10000mAh
- Input : 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Output: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Wireless charging : 5W , 7.5W , 10W , 15W
- Simultaneous output: :5V, 3A
- Size: 103x69x18mm
- Battery cell : 606072\*2/ Lishen



## PRODUCT PARAMETER

### **BW3010P-10000mAh | 3 in 1 | Magnetic Wireless Power Bank**


- Model: BW3010P
- Semi-solid state battery
- Capacity: 36Wh (10000mAh\*1)
- Magnetic Wireless: Mobile Phone: 15W(Max), Smart Watch: 2.5W(Max)
- Type-C1 Input: 5V 3A, 9V 2.22A, 10V 2.25A (22.5W Max)
- Type-C2 Output: 5V 3A, 9V 2.22A, 10V 2.25A (22.5W Max)
- Size: 106x69x17.5mm



## PRODUCT PARAMETER

### WP252 | Qi2.2 | 25W 3-in-1 Wireless Charger Power Bank

- Model: WP252
- USB-C Input: 9V 3A, 12V 3A, 15V 3A
- Wireless Output:
- Mobile Phone: 5W, 7.5W, 10W, 15W, 25W(Max Qi2.2)
- Airpods: 5W(Max)
- Smart Watch: 2.5W(Max)
- Color: White, Black, OEM
- Size: 104\*64\*18mm

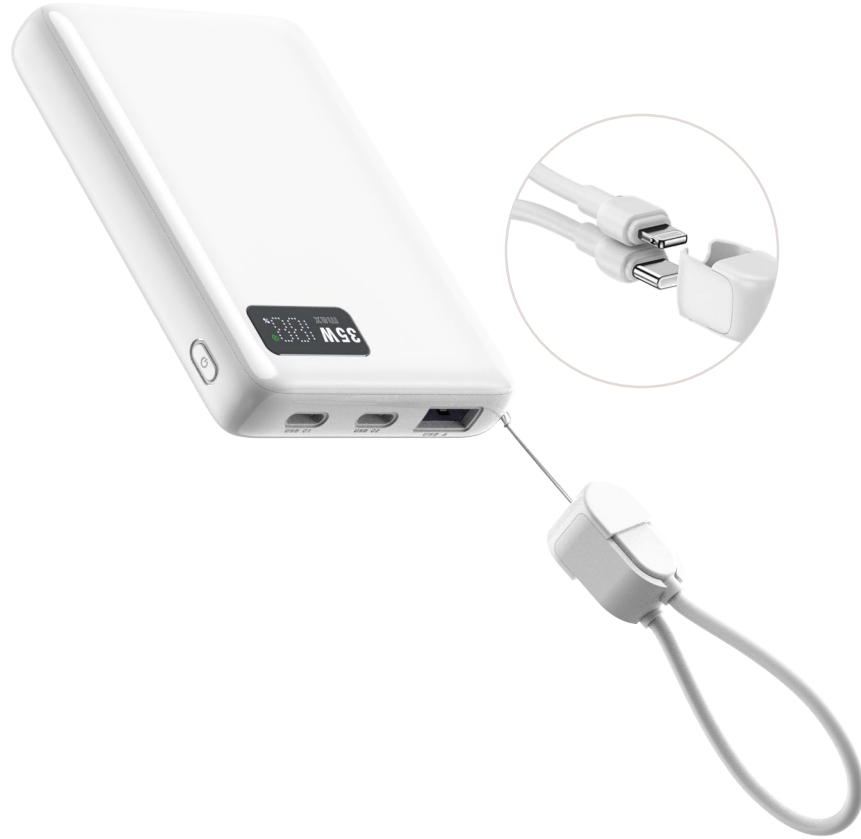

## PRODUCT PARAMETER

### **PB3519M-10000mAh | 2C1A | Battery Display | Power Bank**

- Model: PB3519M
- Capacity: 36Wh (5000mAh\*2 7.2V)
- Input:(Type-C1/C2): 5V 3A, 9V 3A, 12V 2.92A, 15V 2.33A, 20V 1.75A(Max 35W)
- Output: (Type-C1/C2): 5V 3A, 9V 3A, 12V 2.92A, 15V 2.33A, 20V 1.75A(Max 35W)
- PPS: 5-11V=3A(Max 33W)
- Output: (USB-A): 4.5V 5A, 5V 3A, 9V 2.5A, 12V 1.5A(Max 22.5W)
- Output: (Type-C1+C2) 5V 6A(Max 30W)
- Output: (Type-C1+C2+A) 5V 6A(Max 30W)
- Size: 97.2x68.2x15.8mm



## PRODUCT PARAMETER

**PB6528-9000mAh | 2USB-C | Built-in Cable | Battery Display | Power Bank**

- Model: PB6528
- Capacity: 32.4Wh (4500mAh \* 2 7.2V)
- Type-C Input : PD 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A
- Type-C cable Output: PD 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A, QC 5V 3A, 9V 2A, 12V 1.5A, SCP 10V 2.25A
- Type-C Output: PD 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A, QC 5V 3A, 9V 2A, 12V 1.5A, SCP 10V 2.25A
- Total: Type-C Cable+ Type-C =5V 2.4A+5V 2.4A
- Size: 80.2x61.0x26.2mm



## PRODUCT PARAMETER

**PB6528L-10000mAh | 2USB-C | Built-in Cable | Battery Display | Power Bank**

- Model: PB6528L
- Capacity: 10000mAh
- Input Type-C/Type-C Cable : 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 2.25A (45W Max)
- Output Type-C/Type-C Cable :  
5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A, (65W Max)
- Simultaneous output: 5V, 4.8A
- Size: 80.2x61x26.2mm
- Battery cell : 21700\*2/ Jiangsu Sunpower

## PRODUCT PARAMETER

**BC3529 | 35W AC+35W DC | Built-in Plug | Battery Display | Power Bank**



- Model: BC3529 Capacity: 10000mAh
- Charger mode:
- AC Input: 100-240V~50-60Hz
- Single-port output USB-C/USB-C cable: 5V 3A, 9V 3A, 12V 2.9A, 15V 2.3A, 20V 1.75A (35W Max)
- Dual-port output USB-C cable + USB-C: 5V/3A
- Power bank mode:
- Input USB-C to USB-C cable: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A(30WMax)
- Single-port output USB-C/USB-C cable output: 5V 3A,9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Dual-port output USB-C cable + USB-C: 5V/3A
- Charging and discharging simultaneously: When output power is less than input power, charging occurs simultaneously,with discharge taking priority.
- Size: 37x48x111mm
- Battery cell : 114164\*2

## PRODUCT PARAMETER

**BC4529 | 45W AC+45W DC | Built-in Plug | Battery Display | Power Bank**



- Model: BC4529    Capacity: 10000mAh
- Charger mode:
- AC Input: 100-240V~50-60Hz
- Single-port output USB-C/USB-C cable: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 2.25A (45W Max)
- Dual-port output USB-C cable + USB-C: 5V/3A
- Power bank mode:
- Input USB-C to USB-C cable: 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A(30WMax)
- Single-port output USB-C/USB-C cable output: 5V 3A,9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Dual-port output USB-C cable + USB-C: 5V/3A
- Charging and discharging simultaneously: When output power is less than input power, charging occurs simultaneously,with discharge taking priority.
- Size: 37x48x111mm
- Battery cell : 114164\*2
- Battery cell : 18650\*3/CHANGHONG



## PRODUCT PARAMETER

**BC6529 | 65W AC+65W DC | Built-in Plug | Battery Display | Power Bank**

- Model: BC6529 Capacity: 9600mAh
- Charger mode
- AC Input: 100-240V~50-60Hz, 1.5A
- Single-port output: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A (65W Max)
- USB-C / USB-C Cable: 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 3.25A (65W Max)
- Dual-port USB-C cable /USB-C: 45W+20W/20W+45W
- Power bank mode:
- Input USB-C / USB-C cable: 5V 3A, 9V 3A, 10V 2.25A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Single-port output USB-C: 5V 3A, 9V 3A, 12V 2.92A, 15V 2.33A, 20V 1.75A (35W Max)
- USB-C cable: 5V 3A, 9V 3A, 12V 2.92A, 15V 2.33A, 20V 1.75A (35W Max)
- Dual-port USB-C cable/USB-C: 5V 4.8A 24W
- Charging while discharging: AC input supports up to 65W charging. When output power is less than input power, charging occurs simultaneously with priority given to discharging.
- Size: 38x63x99mm

## SHENZHEN XINSPower TECHNOLOGY CO., LTD.

---

Add: The 2nd-4th Floor, The 2nd Building, Xin Hao Sheng Da Yang Technology Park, Fu Rui Road No.11, Qiao Tou Community, Fu Hai Street, Bao An District, Shenzhen, China

Tel (Whatsapp): +86-18665819835

Fax: +86-755-2350-0926

Email: [sales@xinpower.com](mailto:sales@xinpower.com)

Web: [www.xinpowertech.com](http://www.xinpowertech.com)